




TYPE 10

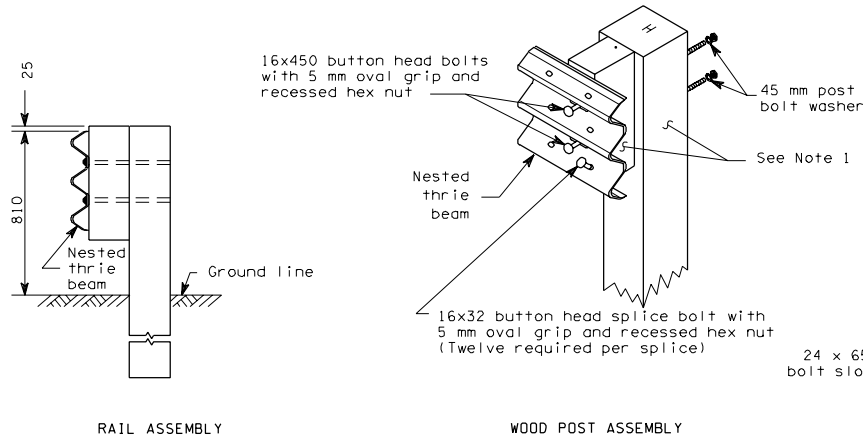

TYPE 11

NOTES

1. Type 10 posts and blocks shall be 6x8 timber or W150x13. Type 11 posts shall be 10x10 timber or W150x22. Type 11 blocks shall be 6x8 timber or W150x22. For details, see Standard Plan "Beam Guardrail Posts and Blocks."
2. Type 10 guardrail post spacing shall be 1905 mm on center. Type 11 shall be a maximum of 960 mm on center.

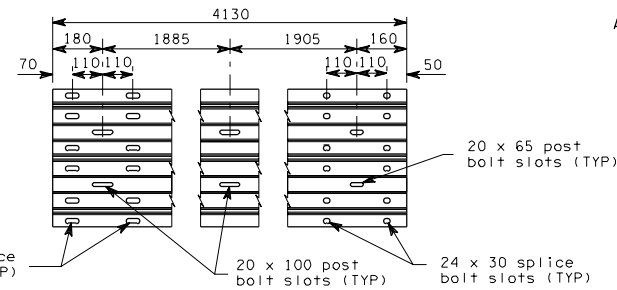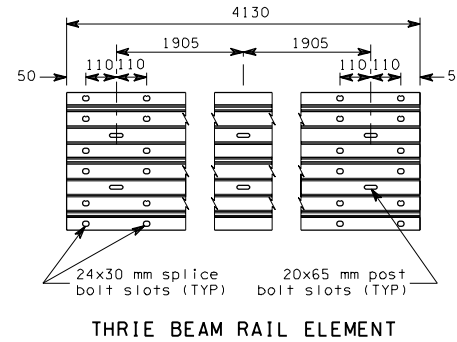

ALL DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE NOTED

**BEAM GUARDRAIL
(THRIE BEAM)**

STANDARD PLAN C-1a

APPROVED FOR PUBLICATION

STATE DESIGN ENGINEER

DATE

WASHINGTON STATE DEPARTMENT OF TRANSPORTATION
OLYMPIA, WASHINGTON